


FlipToggle® Anchor


FlipToggle installs in four easy steps: fold, insert, flip and tighten — it's that quick!




1. Drill a 1/2" hole. Flip the head of the FlipToggle to align with strap.

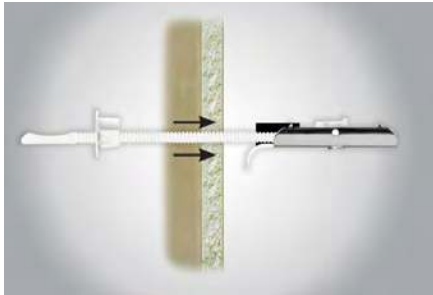



2. Insert the FlipToggle into the drilled hole. When the head is fully inserted, pull the strap to flip the toggle flat against the back of the wall.

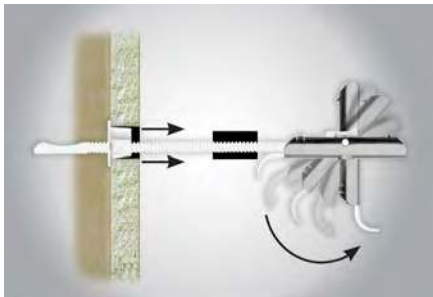

3. Push the collar into the drilled hole until the cap is flush with the wall. Hold the cap against the wall while pulling the strap toward you until it feels reasonably tight.

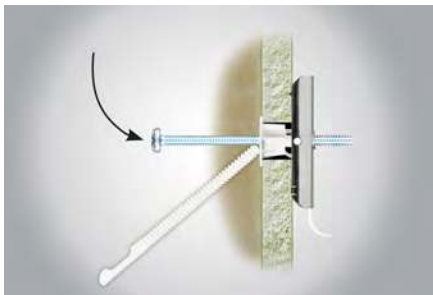

4. Snap off strap flush with collar. Insert the bolt through the fixture into the anchor and tighten securely.

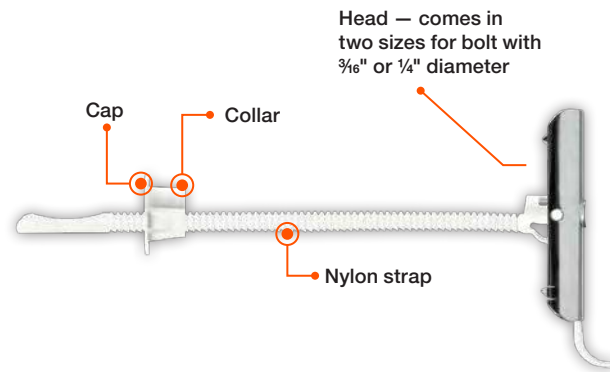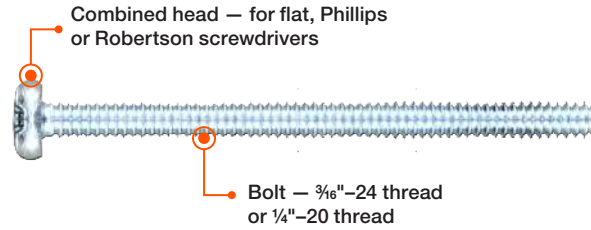

FlipToggle Loads



Material	Size	Drill Size	Tension Loads (lb.)	
			Ultimate	Safe
Drywall 1/2"	3/16"-24	1/2"	178	89
	1/4"-20	1/2"	181	90
Drywall 5/8"	3/16"-24	1/2"	294	147
	1/4"-20	1/2"	299	149
Hollow Block	3/16"-24	1/2"	807	403
	1/4"-20	1/2"	1,030	515

Safe tension loads listed are based on a safety factor of 2.0. Due to variation in base material, a higher safety factor may be applied.

* See p. 13 for an explanation of the load table icons.